


Nautic Lux IV (1500)		With deck-mount faucet		Size:1500*750*620mm	
-----------------------------	--	-------------------------------	--	----------------------------	--

No.	Configuration	Sketch	Unit	Qty
1	HP1.5 pump (220V, 50HZ)		set	1
2	Turbo jet (can be closed)		pcs	4
3	Little jet (can be closed)		pcs	13
4	Stainless steel overflow		set	1
5	1.5' suction net (with chromeplate cover)		set	1
6	Chromatherapy lamp		set	1
7	B6S touch panel		set	1
8	Clean liquid bottle		set	1
9	1.2M drain pipe		set	1
10	Sealing part		set	1
11	Pop-up drain		set	1

No.	Configuration(Optional)	Sketch	Unit	Qty
1	1.5KW heater		set	1
2	Micro-nano bubble		set	1
3	Faucet handle		pcs	3
4	Faucet outlet		pcs	1
5	Hand shower		set	1


Product parameter list	
Rated power/voltage/current of pump	1150W/220VAC/5.2A
Rated power/voltage/current of heater (optional)	1500W/220VAC/6.8A
Maximum water consumption(L)	260

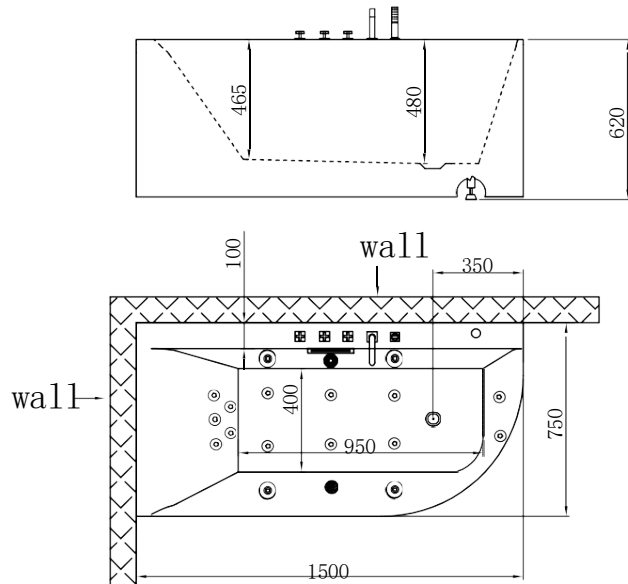

Plane Graph

Water & Power Supply Drawing

Note: The cold water supply must be connected otherwise the disinfection function can't work properly.

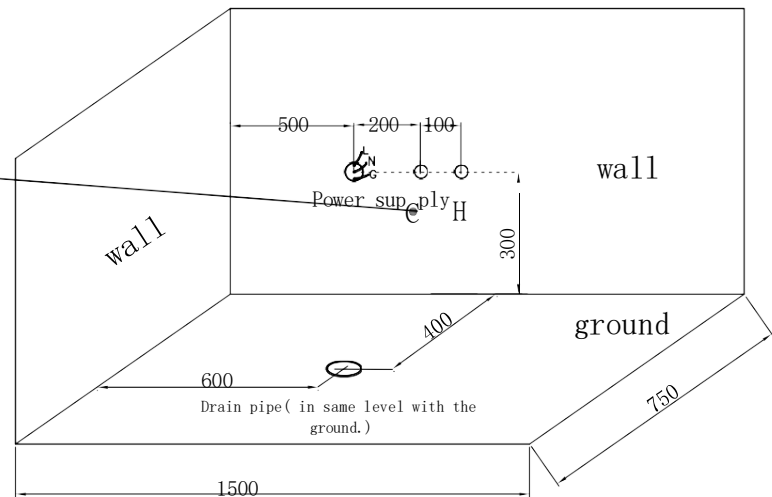

- Drain pipe (DIA. ≥ 50 mm, to drain waste water) in same level with the ground.
- Cold/Hot water supply (reserved length 30mm, $\frac{G_1}{2}$ metric external thread. H/C mean hot and cold water for faucet.
- Wire (reserved length 200mm, square number of electric wire: $3 \times 2.5 \text{mm}^2$, earth wire should be connected.)